

→ +

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Attorney Docket No.		CU-2377 RJ5
First Inventor		Brahim BENSOU et al
Title	METHOD AND APPARATUS FOR ...	
Express Mail Label No.		L 624334027

(Only for new nonprovisional applications under 37 CFR 1.53(b))

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ **Fee Transmittal Form (e.g., PTO/SB/17)**
(Submit an original and a duplicate for fee processing)
2. ☒ **Applicant claims small entity status.**
See 37 CFR 1.27.
3. ☒ **Specification** [Total Pages 32]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table,
or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ **Drawing(s) (35 U.S.C. 113)** [Total Sheets 6]
5. **Oath or Declaration** [Total Pages 4]
- a. ☐ **Newly executed (original or copy)**
- b. ☐ **Copy from a prior application (37 CFR 1.63 (d))**
(for continuation/divisional with Box 17 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
6. ☐ **Application Data Sheet. See 37 CFR 1.76**

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (*Appendix*)
8. Nucleotide and/or Amino Acid Sequence Submission (*if applicable, all necessary*)
- a. ☐ Computer Readable Form (CRF)
- b. Specification Sequence Listing on:
- i. ☐ CD-ROM or CD-R (2 copies); or
- ii. ☐ paper
- c. ☐ Statements verifying identity of above copies

9. ☐ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

11. ☐ English Translation Document (if applicable)

12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

13. ☐ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No.: _____ / _____

Prior application information:

Examiner

Group / Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

☐ Customer Number or Bar Code Label

or ☒ Correspondence address below

Insert Customer No. or Attach bar code label here

<i>Name</i>	Ladas & Parry					
<i>Address</i>	224 South Michigan Avenue					
	Suite 1200					
<i>City</i>	Chicago		<i>State</i>	Illinois	<i>Zip Code</i>	60604
<i>Country</i>	USA	<i>Telephone</i>	(312)427-1300		<i>Fax</i>	(312)427-6663

Name (Print/Type)	Richard J. Street	Registration No. (Attorney/Agent)	25765
Signature			Date 11/02/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

L 624334027

PTO/SB/17 (09-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

TOTAL AMOUNT OF PAYMENT (\$)

485.00

Complete if Known

Application Number	
Filing Date	
First Named Inventor	Brahim Bensaou et al
Examiner Name	
Group Art Unit	
Attorney Docket No.	CU-2377 RJS

METHOD OF PAYMENT

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 12-0400

Deposit Account Name Ladas & Parry

☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17

☒ Applicant claims small entity status. See 37 CFR 1.27

2. ☒ Payment Enclosed:

☒ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity	Small Entity	Fee Code	Fee (\$)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	355.
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$)

355.

2. EXTRA CLAIM FEES

Total Claims 30 -20** = 10 × 9. = 90.

Independent Claims 4 -3** = 1 × 40. = 40.

Multiple Dependent =

Large Entity	Small Entity	Fee Code	Fee (\$)	Fee Description	Fee Paid
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	270	204	135	Multiple dependent claim, if not paid	
109	80	209	40	** Reissue independent claims over original patent	
110	18	210	9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2)

(\$)

130.

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity	Small Entity	Fee Code	Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for ex parte reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

0.

SUBMITTED BY

Name (Print/Type)	Richard J. Street	Registration No.	25765	Telephone	(312)427-1300
Signature	<i>Richard J. Street</i>	Date	11/02/00		

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

METHOD AND APPARATUS FOR COMMUNICATING IN A DISTRIBUTED MULTIPLE ACCESS WIRELESS COMMUNICATION SYSTEM

Field of the Invention

5

The present invention relates to communicating data packets in a distributed multiple access wireless communication system in general, and more particularly to communicating data packets on a common communication channel in such a communication system.

10

Background of the Invention

As is known, distributed multiple access communication systems include dynamic multi-hop wireless communication systems, which are particularly useful in adhoc networking. In such a system, communication units, very often comprising mobile units, share a common communication channel without a network controller to manage allocation of the common communication channel. In addition, such systems are self-configurable and therefore can be installed quickly where temporary communications is required, such as in emergency operations.

In order to share the common communication channel among the communication units, an efficient communication channel access control protocol, also referred to as a medium access control (MAC) protocol, is required. In addition, the MAC protocol must also address a problem known as "hidden terminal".

The hidden terminal problem arises when, due to the limited transmission range of the communication units, multiple transmitting communication units within range of a common receiving communication unit may not receive each others concurrent transmissions, and thus, in effect, are "hidden" from one another. Consequently, when the transmitting communication units transmit to

the same receiver at approximately the same time, the transmitting units are not aware when their transmissions collide at the receiving communication unit. The hidden terminal problem is known to significantly degrade throughput of the communication system.

- 5 Further, due to their multi-hop characteristics, a dynamic multi-hop wireless communication system suffers much more from the hidden terminal problem than, for example, a wireless local area network (LANs) system.

A MAC protocol known as Multiple Access Collision Avoidance
10 (MACA) has been used in a dynamic multi-hop wireless communication system, to allow the common communication channel to be shared, and also to alleviate the hidden terminal problem. This has resulted in significant improvement in throughput in the communication system. The MACA protocol implements an exchange of Request-to-Send (RTS)
15 and Clear-to-Send (CTS) messages between a pair of transmitting and receiving communication units, prior to transmission of a data packet. The MACA protocol forms the basis for several more sophisticated protocols. One example is a protocol known as Floor Acquisition Multiple Access with Non-persistent Carrier Sensing (FAMA-NCS),
20 which is substantially immune to the hidden terminal problem and can achieve good throughput.

In wireless LAN, the IEEE 802.11 specification proposes a MAC protocol called Distributed Foundation Wireless Medium Access Control (DFWMAC) for wireless ad hoc LANs. The DFWMAC protocol provides
25 basic and RTS/CTS access method. Here, the RTS/CTS access method comprises a four-way dialog which includes the sequential communication of control packets and data packets, where RTS, CTS and ACK (acknowledgement) packets are control packets. In sequence, the control and data packets are transmitted as follows: RTS-CTS-
30 DATA-ACK between two communication units on the common communication channel. The DFWMAC protocol, however, does not prevent the data packets from colliding with the control packets and/or

other data packets. To alleviate the adverse effects of such collisions, the DFWMAC protocol uses a sophisticated modified binary exponential backoff scheme to resolve collisions.

The MACA and DFWMAC protocols are useful in non-realtime applications such as file transfer where the need for communicating time sensitive data packets is minimal. Presently, there is a growing need for such systems to support real time applications such as voice and even video. Consequently, the data packets for realtime applications need to be conveyed more quickly than for example data packets carrying information for file transfer.

In a known proposal for wireless LAN system, to differentiate data packets of realtime applications from data packets that are not, quality of service (QOS) parameters associated with the data packets of realtime applications are used when communicating those data packets. Stations on the LAN with real-time data packets in a transmission queue jam the common communication channel with, what is known as, Black Bursts (BB). The QOS parameters reflect the urgency with which the realtime data packets should be communicated, and duration of BB are determined in accordance with the QOS and is proportional to the delay incurred by the data packets. The station that transmits the BB with the longest duration gets access to the common communication channel, and can then transmit a data packet from its transmission queue. However, this approach fails when hidden terminals exist as those hidden terminals may experience the same delay, and each BB contention period is not guaranteed to result in a unique winner. Thus, real-time data packets will still suffer from collisions if this method were to be used in a dynamic multi-hop wireless communication system.

Another MAC protocol, GAMA (Group Allocation Multiple Access), schedules real-time and non-real-time or so called datagram traffic in a single-hop wireless ad-hoc LAN. The GAMA protocol includes a contention period, during which stations can transmit a request to join

a transmission group, and a contention-free period, during which stations in a transmission group take turns to transmit data packets. Again, this approach does not work well if hidden terminals exist. This is because when hidden terminals do not join the transmission group
5 that they may interfere with, then the GAMA protocol cannot ensure that data packets will be free from collision. When hidden terminals do join the transmission group to avoid collision, then all other stations in the LAN have to join the same transmission group one by one. It would be difficult to maintain such a global group in a dynamic multi-hop
10 wireless communication system due to the dynamic nature of the system. Another drawback is the benefit from spatial reuse of communication channels would be limited.

Further, the wireless LAN protocols described above do not support ad hoc routing because in a wireless LAN system a wireless
15 access point can reach all other stations and can relay data packets. In contrast, in a dynamic multi-hop wireless communication system, there is no common access point, hence, routing is another concern.

In addition, unlike in conventional wired networks, a communication unit that acts as a router in a dynamic multi-hop
20 wireless communication system, typically has a single network interface i.e. there are no separate links for the communication unit to route data packets or exchange routing information. This is a particular concern when some communication units in a dynamic multi-hop wireless communication system act as cluster heads or belong to the core of a
25 routing structure. In such circumstances, more traffic will transit through such communication units, in addition to data packets of its own, and therefore, such communication units should have a higher priority in accessing the communication channel to route data packets between other communication units relative to data packets of its own.

30 Therefore, the LAN protocols discussed above are not directly applicable in a dynamic multi-hop wireless communication system, and although there are existing MAC protocols for dynamic multi-hop

wireless communication system, these MAC protocols do not address both the hidden terminals problem and take into account the requirements of communicating time sensitive data packets to support realtime applications.

5

Brief Summary of the Invention

The present invention therefore seeks to provide a method and apparatus for communicating data packets on a common
10 communication channel in a distributed multiple access wireless communication system, which overcomes, or at least reduces the above mentioned problems of the prior art.

Accordingly, in one aspect, the invention provides a method for communicating at least one data packet between a first and a second of
15 a plurality of communication units on a common communication channel in a distributed multiple access wireless communication system, the method comprising the steps of:

a) providing the at least one data packet to the first communication unit for transmission by the first communication unit
20 to the second communication unit;

b) providing at least one quality of service (QOS) parameter to the first communication unit, wherein the at least one QOS parameter is associated with the at least one data packet;

c) the first communication unit determining at least a first
25 transmission parameter from the at least one quality of service parameter;

d) the first communication unit transmitting a transmit request message in accordance with the at least the first transmission parameter;

30 e) the second communication unit transmitting a transmit grant message in response to receiving the transmit request message; and

f) in response to the first communication unit receiving the transmit grant message from the second communication unit, the first communication unit transmitting the at least one data packet.

In another aspect, the present invention provides a method in a first of a plurality of communication units for transmitting at least one data packet to a second of the plurality of communication units on a common communication channel in a distributed multiple access wireless communication system, the method comprising the steps of:

- a) providing the at least one data packet for transmission to the second of the plurality of communication units;
- b) providing at least one quality of service parameter, wherein the at least one preferred communication quality parameter is associated with the at least one data packet;
- c) determining at least a first transmission parameter from the at least one quality of service parameter;
- d) transmitting the transmit request message in accordance with the at least the first transmission parameter; and
- e) in response to receiving a transmit grant message from the second communication unit, the first communication unit transmitting the at least one data packet.

In yet another aspect the present invention provides a method for communicating at least one data packet in a distributed multiple access wireless communication system, the method comprising the steps of:

- a) providing at least one data packet for transmission in the distributed multiple access wireless communication system;
- b) providing at least one quality of service parameter;
- c) determining a delay time and an access time from the at least one quality of service parameter;
- d) packetising a request to transmit message which includes the delay time;

e) transmitting the request to transmit message after the access time has elapsed;

f) receiving the request to transmit data packet;

5 g) transmitting a clear to transmit message after the delay time has elapsed;

h) receiving the clear to transmit message;

i) transmitting the at least one data packet;

j) receiving the at least one data packet;

k) transmitting an acknowledge message;

10 l) receiving the acknowledge message.

An additional aspect of the present invention provides a communication unit for communicating data packets to another communication unit on a common communication channel in a distributed multiple access wireless communication system, the
15 communication unit comprising:

a) a data input for receiving at least one data packet for transmission to the another communication unit;

b) a quality of service (QOS) input for receiving at least one quality of service parameter, wherein the QOS is associated with the at least
20 one data packet;

c) a wireless receiver coupled to receive incoming control and data packets on the common communication channel, and having an output for providing the control and data packets;

d) a decoder having an input coupled to the output of the wireless
25 receiver for receiving the incoming control and data packets, the decoder having a first output for providing the incoming control packets, and having a second output coupled to provide the incoming data packets to a data output;

e) a controller coupled to the QOS input, the controller having an
30 input coupled to the first output of the decoder for receiving incoming control packets, the controller for generating outgoing control packets in accordance with the at least one quality of service parameter and the

incoming control packets, and the controller having an output for providing the outgoing control packets;

f) an encoder having a first input coupled to the output of the controller for receiving the outgoing control packets, the encoder having
5 a second input coupled to the data input for receiving the at least one outgoing data packet, and the encoder having an output for providing the outgoing control packets and the at least one outgoing data packet;
and

g) a transmitter having an input coupled to the output of the
10 encoder for receiving the outgoing control packets and the at least one outgoing data packet, and the transmitter having an output adapted to transmit the outgoing control packets and the outgoing at least one data packet on the common communication channel.

15 Brief Description of the Drawings

An embodiment of the present invention will now be more fully described, by way of example, with reference to the drawings of which:

FIG. 1 shows a communication system in accordance with the
20 present invention;

FIG. 2 shows a flowchart detailing operation of a communication unit in the communication system in FIG. 1 when transmitting data packets;

FIG. 3 shows a flowchart detailing operation of a communication
25 unit in the communication system in FIG. 1 when receiving data packets;

FIG. 4 shows a timing diagram of the communication system in FIG. 1;

FIG. 5 shows another timing diagram of the communication
30 system in FIG. 1; and

FIG. 6 shows a communication unit in the communication system in FIG. 1.

Detailed description of the Drawings

Throughout the following description, processing time and
 5 transmit-to-receive turnaround time of communication units are
 ignored. However, it will be appreciated by those skilled in the art, that
 consideration for the processing time and transmit-to-receive
 turnaround time of the communication units may be incorporated
 without adversely affecting the operation of the communication system
 10 as described herein.

In addition, definitions of notation that are used in the
 description follow:

	rtPacket:	data packet with QOS parameters;
	nrtPacket:	data packet without QOS parameters;
15	T_d :	maximum one-hop channel propagation delay time;
	T_{rts} :	time to transmit a RTS packet;
	T_{cts} :	time to transmit a CTS packet;
	T_{data} :	time to transmit a data packet;
	T_{ack} :	time to transmit an ACK packet;
20	T_{delay} :	delay time to reply to an RTS;
	T_{left} :	time left for a rtPacket to be delivered;
	T_{max} :	maximum time to complete one successful RTS-CTS-data packet-ACK transmission;
	T_{access} :	time allowed to sense a common communication channel is 25 idle before transmitting an RTS packet;
	T_{defer} :	maximum time a communication unit should defer access to a common communication channel after detecting a collision before entering a backoff process. T_{defer} is determined by $T_{data} + 3 * T_d$;
30	T_{unit} :	time used as a factor to map packet delay requirement to backoff timer. Note that time is defined in terms of this unit. (e.g. millisecond or microsecond, or 10 microsecond) it

depends on the accuracy and the granularity of the hardware clock;

N_{lost} : number of data packets dropped during a communication session;

5 N_{sent} : number of data packets sent during a communication session; and

PLR: packet loss ratio.

Further, the following time conditions are imposed:

$$T_{rts} > 2 * T_d \quad (1)$$

10 $T_{cts} > T_{rts} + 2 * T_d \quad (2)$

With reference to FIG. 1, three communication units 105, 110 and 115 are operating on a communication channel of a distributed multiple access communication system 100. The three communication units each have communication coverage areas 105A, 110A and 115A, respectively, where the communication unit 110 can communicate with the communication units 105 and 115, but where the communication units 105 and 115 are not able to communicate directly with each other i.e. the communication units 105 and 115 are “hidden” from each other.

With additional reference to FIG.2, the operation of the communication unit 110 when transmitting a data packet will now be described. When the communication unit 110 is not transmitting or receiving, the communication unit 110 monitors a common communication channel (not shown). When the communication unit 110 determines 205 that a data packet for transmission to the communication unit 105 and QOS parameters associated with the data packet have been provided by an upper layer, two transmission time parameters, T_{access} and T_{delay} , as defined earlier, are determined 210 using the QOS parameters.

The common communication channel is then monitored 250 until time T_{access} has elapsed 220. After T_{access} has elapsed without any activity detected by the communication unit 110 on the common communication channel, the communication unit 110 composes 225 an

5 The predetermined time includes T_{delay} and T_d . It can be estimated or calculated from the transmitter power, the distance and the characteristics of the propagation of radio waves in either open air or traversing walls, as well as the nature of the material in the wall, as is known by those skilled in the art.

When a CTS packet is received 235 from the communication unit 105, the data packet is transmitted 240 to the communication unit 105. However, when a CTS packet is not received 235 from the communication unit 105, the communication unit enters a backoff process.

30 After transmitting 240 the data packet to the communication unit
105, the communication unit 110 determines 245 whether an ACK

packet is received from the communication unit 105 within a predetermined time. The predetermined time includes T_d .

When an ACK packet is received 245 from the communication unit 105, the ACK packet provides confirmation to the communication unit 110 that the data packet has been successfully received by the communication unit 105, and the communication unit 110 returns to determining 205 whether another data packet and associated QOS parameters have been provided for transmission.

However, when an ACK packet is not received 245 from the communication unit 105, the communication unit 110 concludes that a collision has occurred and that therefore the data packet has not been transmitted successfully. The communication unit 110 then enters the backoff process 255 and 260 as described above.

With particular reference to FIG. 3, the operation of the communication unit 110 when receiving a data packet will now be described. As described earlier, when the communication unit 110 is not transmitting or receiving data packets, the communication unit 110 monitors the common communication channel. When the communication unit 110 receives 305 an RTS (105) packet from, for example, the communication unit 105, the information $T_{\text{delay}}(105)$ is extracted 310 from the RTS (105) packet.

The communication unit 110 then monitors the common communication channel for receipt 315 of any other RTS packets for the period 320 of time $T_{\text{delay}}(105)$. When no other RTS packets are received during the time $T_{\text{delay}}(105)$, the communication unit 110 transmits 325 a CTS (105) packet to the communication unit 105.

Alternatively, when another RTS (115) packet is received 315 from, for example the communication unit 115, before time $T_{\text{delay}}(105)$ has elapsed, the $T_{\text{delay}}(115)$ is extracted 340 from the later RTS (115) packet, and compared with the $T_{\text{delay}}(105)$ of the earlier RTS (105) packet to determine 345 whether the earlier $T_{\text{delay}}(105)$ is less than the later $T_{\text{delay}}(115)$. If $T_{\text{delay}}(105)$ is less than the later $T_{\text{delay}}(115)$, then the

However, when $T_{\text{delay}}(105)$ is not less than the later $T_{\text{delay}}(115)$, the communication unit 110 changes 350 the delay time T_{delay} from $T_{\text{delay}}(105)$ to $T_{\text{delay}}(115)$. The communication unit 110 will now wait until time $T_{\text{delay}}(115)$ elapses before transmitting a CTS (115) packet to the communication unit 115. In this way, a number of RTS packets may be received by the communication unit 110 from a number of communication units during time $T_{\text{delay}}(105)$ but the RTS from the communication unit that provides the shortest T_{delay} will receive a CTS packet from the communication unit 110. This means that the station with the most urgent application i.e. the one with the shortest T_{delay} will preempt all other stations and have its data packets communicated with a higher priority.

Alternatively, when the data packet is not received 330 by the communication unit 110 within a predetermined time, the communication unit 110 concludes that a collision has occurred, and returns to monitoring 305 the common communication channel for receipt of RTS packets.

With particular reference now to FIG. 4, determination of T_{access} and T_{delay} will now be further described in the communication system 100. The three communication units 105, 110 and 115 are shown, each with a corresponding timeline to illustrate the timing relationship

between control packets, RTS, CTS and ACK, and data packets, that are communicated between the communication units 105, 110 and 115 in the communication system 100.

Note that the timing conditions (1) and (2), as listed earlier, are adopted from the FAMA-NCS protocol so that although the communication unit 115 is hidden from communication 105, and thus communication unit 115 does not receive an RTS packet transmitted by communication unit 105, if communication unit 115 transmits an RTS packet that at most collides with a CTS packet transmitted from communication unit 110 to communication unit 105, the timing conditions (1) and (2) ensure that communication unit 115 receives at least the trailer of the CTS packet, and thus communication unit 115 would abort any transmission and enter the backoff process. Consequently, a data packet can be transmitted from communication unit 105 to communication unit 110 collision free.

As described above, when the communication unit 110, has a data packet 440 to transmit to the communication unit 105, the communication unit 110 monitors the common communication channel, and waits until it senses that the common communication channel has been idle, i.e. not in use by any other communication unit, for a predetermined period of time T_{access} 420. Only after the common communication channel has been idle for time T_{access} 420 can the communication unit 110 transmit an RTS packet 425 on the common communication channel.

One method for determining time T_{access} 420 is given by ALGORITHM 1 below. However, it will be appreciated by those skilled in the art that other QOS parameters than the PLR and the delay (T_{left}) can be used in the algorithm to calculate T_{access} .

IF (nrtPacket or rtPacket with $T_{\text{left}} > 1$ sec) THEN

$T_{\text{access}} = 2 * T_d$

ELSE

IF ($T_{\text{left}} > 0$) THEN

$$T_{\text{access}} = T_{\text{left}} - (N_{\text{lost}} - \text{PLR} * N_{\text{sent}}) * T_{\text{max}}$$

IF $T_{\text{access}} < 0$ THEN

$$T_{\text{access}} = 0$$

ELSE

$$5 \quad T_{\text{access}} = 2 * T_d / \lfloor \log_2 (T_{\text{access}} / 2) \rfloor$$

END IF

END IF

END IF

ALGORITHM 1

10 The calculation of time T_{access} using ALGORITHM 1 is based on QOS parameters associated with the data packet to be transmitted, and on perceived QOS parameters. In ALGORITHM 1, the QOS parameter is the PLR component while the perceived QOS parameters are the N_{lost} and N_{sent} components in the equation below

$$15 \quad T_{\text{access}} = T_{\text{left}} - (N_{\text{lost}} - \text{PLR} * N_{\text{sent}}) * T_{\text{max}}$$

In order to reduce waste of bandwidth caused by time T_{access} , time-sensitive packets, i.e. rtpackets, which have a time to live (time within which the data packet has to be delivered) of more than one second, compete at the same priority level as the non-time sensitive packets, i.e. nrtPackets. The rtPackets would gain higher priority when they become more urgent with the passage of time. For example, when a data packet has been subject to one or more backoff times. Initially, at an rtPacket's first attempt, the time T_{left} is initialized to a value equal to the maximum tolerable delay of the data packet. Subsequently, time T_{left} decreases with the passage of time. Alternatively, the time T_{left} is initialized to a value which is proportional to the maximum tolerable delay of the data packet. Then, subsequently, time T_{left} decreases with the passage of time in the same proportion. The equation,

$$T_{\text{access}} = T_{\text{left}} - (N_{\text{lost}} - \text{PLR} * N_{\text{sent}}) * T_{\text{max}}$$

30 from ALGORITHM 1 shows that the more the communication unit 110 suffers excess dropped packets, i.e.

$$N_{\text{lost}} - \text{PLR} * N_{\text{sent}}$$

the shorter time T_{access} will be. Thus, when two of the communication units 105, 110 and 115 attempt to access the common communication channel simultaneously, time T_{access} will tend to differentiate their attempts according to QOS parameters of the data packets to be communicated.

When the communication unit 110 succeeds in getting access to the common communication channel, the communication unit 110 determines time T_{delay} 430, the value of which is then incorporated in the RTS packet 425, and the RTS packet 425 is then transmitted to the communication unit 105. The value of T_{delay} 430 indicates how long the intended receiver, the communication unit 105, waits before replying to the communication unit 110 with a CTS packet 435. The method for determining time T_{delay} 430 is given by ALGORITHM 2 below. However, it will be appreciated by those skilled in the art that other algorithms that use the QOS parameters can be used to calculate T_{delay} 430.

IF (nrtPacket) THEN

$$T_{\text{delay}} = 2 * T_{\text{rts}}$$

ELSE

IF ($T_{\text{left}} / T_{\text{max}} > 2$) THEN

$$T_{\text{delay}} = 2 * T_{\text{rts}}$$

ELSE

$$T_{\text{delay}} = (T_{\text{left}} / T_{\text{max}}) * T_{\text{rts}}$$

ENDIF

ENDIF

ALGORITHM 2

From ALGORITHM 2, the component $T_{\text{left}} / T_{\text{max}}$ in the equation

$$T_{\text{delay}} = (T_{\text{left}} / T_{\text{max}}) * T_{\text{rts}}$$

reduces when the time T_{left} reduces. Therefore, time T_{delay} 430 reduces when time T_{left} reduces with the passage of time. The result is, when the CTS packet 435 has not been transmitted and the time left i.e. T_{left} to transmit the CTS packet 435 is getting shorter, the time which the receiving communication unit 105 is allowed to wait i.e. T_{delay} 430, before

transmitting the CTS packet 435 to the communication unit 110, is made shorter to reduce the probability of another communication unit 115 gaining access to the common communication channel during the time T_{delay} 430. Or to put it another way, the shorter time T_{delay} 430
 5 increases the probability that the communication unit 105 will gain access to the common communication channel, relative to the other communication unit 115.

After the communication unit 110 receives the CTS packet 435, the communication unit 110 transmits a data packet 440 to the
 10 communication unit 105, and when the data packet 440 is successfully received by the communication unit 105, the communication unit 105 transmits an ACK packet 445, which is received by the communication unit 110.

It will be noted that there is a time lag between the transmission
 15 and receipt of the control packets RTS 425, CTS 435 and ACK 445 and the data packet 440 between the communication units 105 and 110. This is caused by the propagation delay time between the communication units.

With reference now to FIG. 5, a description of what occurs when
 20 the two communication units 105 and 115 attempt to communicate with the communication unit 110, now follows. At the communication unit 105, a data packet (not shown) is provided for transmission to the communication unit 110 at time $t(501)$, while at the communication unit 115, another data packet (not shown) is provided for transmission
 25 to the communication unit 110 at time $t(503)$, which is later than time $t(501)$. Due to the lack of a global coordinator in the communicating system 100, and the lack of a global state, the communication unit 115 will not be able to successfully transmit an RTS packet 507 to the communication unit 110 before the communication unit 105 transmits
 30 an RTS packet 505. This is because,

$$t(503) + T_{\text{access}}(115) > t(501) + T_{\text{access}}(105)$$

where $T_{\text{access}}(115)$ is the access time associated with the data packet at the communication unit 115.

Hence, the communication unit 115 is ready to transmit the RTS packet 507 at time $t(507)$ which is later than time $t(509)$, the time at which the communication unit 105 is ready to transmit the RTS packet 505.

However, when the QOS parameters of the data packet (not shown) which the communication unit 115 wishes to transmit to the communication unit 110 has a higher priority, the result is that the $T_{\text{delay}}(115)$ provided with the RTS packet 507 transmitted by the communication unit 115, is significantly shorter than the $T_{\text{delay}}(105)$ provided with the RTS packet 505 transmitted by the communication unit 105. Or simply put, the resultant delay target of the transmission from the communication unit 115 is more stringent than that from the communication unit 105.

Consequently, the communication unit 105 sets a value T_{delay} (105) in the RTS 505 packet which tells the communication unit 110 the amount of time it can wait before replying with a CTS packet. After the communication unit 115 receives the end of the RTS packet 505 at time $t(511)$, the communication unit 115 will apply the same procedure it uses for the first attempt at accessing the common communication channel, however, this time employing the remaining time.

25 Hence, the communication unit 115 will wait until time $t(511)$ when it senses the common communication channel is idle, and will then determine T_{left} and T_{access} as described in Algorithm 1. In Figure 5, the time interval between $t507$ and the start of RTS 507 is the new T_{access} 115 calculated by the communication unit 115.

30 If time T_{left} is less than time T_{delay} (105), i.e., if the communication unit 115 access timer expires before the access timer of the communication unit 110 replies with a CTS to the communication unit

105, then the communication unit 115 can transmit the RTS packet 507 to the communication unit 110 that will preempt the RTS packet 505 from the communication unit 105.

In this way, although the communication unit 105 succeeded in transmitting the RTS packet 505 before the communication unit 115 transmitted the RTS packet 507, the communication unit 115 has the possibility to preempt the communication unit 105 and gain access to the common communication channel before the communication unit 105 starts transmitting its data packet (not shown).

When calculating time T_{delay} for an rtPacket, only time T_{left} is used. This is because T_{left} is a composite value affected by both packet delay and packet drop ratio. Therefore, an RTS packet for a data packet that is more delay sensitive will have a shorter T_{delay} when the data packet is about to expire. The present method will permit data packets to gain higher priorities after they are delayed for some time.

Communication units usually do not reply with a CTS packet immediately after receiving an RTS packet, unless required to do so, therefore a communication unit may receive multiple RTS packets. If the RTS packets which arrive later require shorter delays than that of the earlier received RTS packets, a communication unit can reply to the respective originating communication unit with the shortest delay first. This makes it possible for delay sensitive data packets to preempt other data packets. In addition, in this embodiment of the invention, time T_{delay} does not exceed two times an RTS packet transmission time to minimize communication overhead.

Control packets may collide with each other, therefore communication units that detect collisions should wait for T_{defer} and then back off for a random time T_{backoff} , which is calculated as shown below in ALGORITHM 3, where $U(0,x)$ is a uniformly distributed random number in the interval 0 to x.

IF (nrtPacket or rtPacket with $T_{\text{left}} / T_{\text{unit}} > \text{Maxtimer}$) THEN

$$T_{\text{backoff}} = U(0, \text{Maxtimer}) * 2 T_d$$

ELSE

$$T_{\text{backoff}} = U(0, T_{\text{left}} / T_{\text{unit}}) * 2 T_d$$

END IF

ALGORITHM 3

5 The value of Maxtimer is set to a large value, for example 800, which is comparable to the maximum timer used in the DFWMAC protocol. T_{backoff} is based on a uniform distribution whose upper bound value varies according to the delay requirement of a data packet. This calculation will statistically give a communication unit that has delay
10 sensitive data packets a shorter T_{backoff} . Therefore, on average, such a communication unit will end the backoff period earlier than other communication units and attempt to gain access to the common communication channel again.

To illustrate how T_{backoff} contributes in differentiating
15 communications from the communication units, we refer again to FIG. 5. When the communication units 105 and 115 are hidden from each other, the communication unit 115 will not be aware of the RTS packet 505 transmitted by the communication unit 105. Consequently, after time $T_{\text{access}}(115)$ has elapsed, the communication unit 115 will transmit
20 the RTS packet 507. The RTS packet 505 and the RTS packet 507 will collide when both are received at the communication unit 110.

After waiting for time $T_{\text{delay}}(105)$ and $T_{\text{delay}}(115)$ to elapse and not receiving a CTS packet, the communication units 105 and 115, respectively, determine that a collision has occurred, and both of the
25 communication units enter the backoff process, as was mentioned earlier. The backoff process involves determining $T_{\text{backoff}}(105)$ and $T_{\text{backoff}}(115)$ and using the ALGORITHM 3 above with their respective QOS parameters, which are incorporated into the T_{left} component. In this example, the QOS at the communication unit 115 results in data
30 packet at the communication unit 115 having a higher priority relative to the data packet at the communication unit 105. This causes the $T_{\text{backoff}}(115)$ to be computed from a smaller interval of the uniform

distribution of backoff time, than the T_{backoff} (105). Consequently, the probability of the communication unit 115 terminating its backoff time before the communication unit 105 is higher, and the communication unit 115 is statistically more likely to gain access to the common communication channel.

In FIG. 6, a communication unit 600 for operating on the communication system 100 includes an input terminal 605 for receiving control and data packets on a common communication channel (not shown). The input terminal 605 is coupled to a wireless receiver 610, which typically comprises the receiving part of a transceiver. The wireless receiver 610 receives an RF signal and the signal is demodulated and provides the incoming control and data packets to a decoder 615. It should be noted that no particular coding or modulation scheme is addressed here, as we are concerned with the medium access control protocol. The modulation or coding relates to the physical layer.

The decoder 615 detects the incoming control packets and provides any incoming control packets to a controller 620, and provides the incoming data packets to a data output 625.

The controller 620 receives the control packets from the decoder 615 and has an input coupled to a QOS input 630 for receiving at least one QOS parameter. In addition, the controller 620 monitors the common communication channel for activity via the decoder 615. The controller 620 generates outgoing control packets in accordance with the at least one QOS parameter, the incoming control packets, and whether there is activity on the common communication channel.

The controller 620 provides the outgoing control packets to an encoder 635. The encoder 635 has another input coupled to a data input 640 for receiving outgoing data packets for transmission. For each of the outgoing data packets that are provided to the encoder 635 there may be corresponding QOS parameters which are provided to the controller 620.

The encoder 635 has an output that provides the outgoing control packets and the outgoing data packets to a wireless transmitter 645, which transmits the outgoing control and data packets via an output terminal 650 on the common communication channel. The wireless
5 transmitter 645 comprises the transmitting part of a transceiver. The input terminal 605 and the output terminal 650 can be coupled to a common antenna.

The communication unit comprises a mobile data terminal which includes both a communications interface and software. The
10 communication interface comprises a transceiver, controller, and encoders as described earlier in FIG.6. The communication software may comprise a layered protocol stack such as Asynchronous Transfer Mode (ATM) or TCP/IP, where the application layer provides the QOS parameters at the initiation of a communication session. QOS
15 parameters comprise metrics which characterize the quality of the communication during a session or on a packet by packet basis. The QOS parameters can include a packet loss ratio which defines the percentage of packets that can be allowed to be dropped or lost; the delay each packet should not exceed; and delay variation from one
20 packet to another.

The present invention, as described, provides a distributed multiple access communication system which addresses both the hidden terminals problem and takes into account the requirements of communicating time sensitive data packets to support realtime
25 applications.

This is accomplished by controlling access to a common communication channel based on priorities of data packets queued at the communication units using three timers calculated according to the QOS requirements of data packets at each communication unit. The
30 first timer sets access time, the time a communication unit should wait after the communication channel becomes idle before transmitting an RTS packet. The access time is dynamically adjusted based on the QOS

requirements. The second timer is carried in every RTS packet. It indicates how long the intended receiving communication unit can wait before replying with a CTS packet. Again, the second timer is dynamically adjusted. This allows an earlier sent RTS packet to be
5 preempted by a later sent RTS packet having a higher priority data packet transmission request. The third timer indicates backoff time, the time that a communication unit should wait before retransmission when collision occurs. The backoff time is uniformly distributed, however the upper bounds of the distribution vary among
10 communication units. Communication units that have higher priority packets have lower upper bounds. Therefore, they can statistically recover earlier than other communication units and attempt access to the common communication channel again. Communication units queued with non-realtime data packets, have a fixed large upper bound.

15 The present invention therefore provides a method and apparatus for communicating data packets on a common communication channel in a distributed multiple access wireless communication system, which overcomes, or at least reduces the above mentioned problems of the prior art.

20 It will be appreciated that although only one particular embodiment of the invention has been described in detail, various modifications and improvements can be made by a person skilled in the art without departing from the scope of the present invention.

We claim:

Claims

1. A method for communicating at least one data packet between a first and a second of a plurality of communication units on a common communication channel in a distributed multiple access wireless communication system, the method comprising the steps of:
- a) providing the at least one data packet to the first communication unit for transmission by the first communication unit to the second communication unit;
 - b) providing at least one quality of service (QOS) parameter to the first communication unit, wherein the at least one QOS parameter is associated with the at least one data packet;
 - c) the first communication unit determining at least a first transmission parameter from the at least one QOS parameter;
 - d) the first communication unit transmitting a transmit request message in accordance with the at least the first transmission parameter;
 - e) the second communication unit transmitting a transmit grant message in response to receiving the transmit request message; and
 - f) in response to the first communication unit receiving the transmit grant message from the second communication unit, the first communication unit transmitting the at least one data packet.
2. A method in accordance with claim 1 wherein step (b) precedes step (a).
3. A method in accordance with claim 1 wherein step (c) further comprises the step of determining access time on expiry of which the first communication unit transmits the transmit request message.

4. A method in accordance with claim 3, wherein step (c) further comprises the step of monitoring whether access time has expired from time the at least one data packet is received.

5 5. A method in accordance with claim 3, wherein step (c) further comprises, on expiry of the access time, the step of determining whether the common communication channel is available prior to transmitting the transmit request message.

10 6. A method in accordance with claim 1 further comprising, after step (c) but before step (d), the step of determining whether the common communication channel is available.

15 7. A method in accordance with claim 1 further comprising, after step (f), the steps of:

in response to the second communication unit receiving the at least one data packet, the second communication unit transmitting an acknowledge message; and

20 the first communication unit receiving the acknowledge message.

8. A method in accordance with claim 1 wherein step (c) further comprises the step of determining at least a second transmission parameter from the at least one quality of service parameter;

25 wherein step (d) further comprises the step of including the at least the second transmission parameter in the transmit request message, and

30 wherein step (e) further comprises the step of transmitting the transmit grant message in accordance with the second transmission parameter.

9. A method in accordance with claim 8 further comprising, after step (f), the step of:

in response to the second communication unit receiving the at least one data packet, the second communication unit transmitting an
5 acknowledge message; and
the first communication unit receiving the acknowledge message.

10. A method in accordance with claim 8 further comprising, after step (c) but before step (d), the step of determining whether the common
10 communication channel is available.

11. A method in accordance with claim 1, wherein step (c) comprises the step of determining when the first communication unit transmits the transmit request message.
15

12. A method in accordance with claim 1 further comprising, after step (d) but before step (e), the step of determining whether the common communication channel is available.

20 13. A method in a first of a plurality of communication units for transmitting at least one data packet to a second of the plurality of communication units on a common communication channel in a distributed multiple access wireless communication system, the method comprising the steps of:

25 a) providing the at least one data packet for transmission to the second of the plurality of communication units;

b) providing at least one quality of service (QOS) parameter, wherein the at least one QOS parameter is associated with the at least one data packet;

30 c) determining at least a first transmission parameter from the at least one quality of service parameter;

d) transmitting the transmit request message in accordance with the at least the first transmission parameter;

e) in response to receiving a transmit grant message from the second communication unit, the first communication unit transmitting
5 the at least one data packet.

14. A method in accordance with claim 13 further comprising, prior to step (d), the step of determining whether the common communication channel is available.

10

15. A method in accordance with claim 13 wherein step (c) further comprises the step of determining the transmission time for transmitting the transmit request message.

15

16. A method in accordance with claim 13 wherein step (c) further comprises the step of determining a delay time on expiry of which the transmit request message is transmitted.

20

17. A method in accordance with claim 16 wherein step (d) further comprises the step of monitoring receipt of any other transmit request messages during the delay time.

25

18. A method for communicating at least one data packet in a distributed multiple access wireless communication system, the method comprising the steps of:

a) providing at least one data packet for transmission in the distributed multiple access wireless communication system;

b) providing at least one quality of service (QOS) parameter;

c) determining a delay time and an access time from the at least
30 one QOS parameter;

d) packetising a request to transmit message which includes the delay time;

e) transmitting the request to transmit message after the access time has elapsed;

f) receiving the request to transmit data packet;

g) transmitting a clear to transmit message after the delay time
5 has elapsed;

h) receiving the clear to transmit message;

i) transmitting the at least one data packet;

j) receiving the at least one data packet;

k) transmitting an acknowledge message;

10 l) receiving the acknowledge message.

19. A method in accordance with claim 18 further comprising,
after step (g) the steps of:

waiting until a predetermined time lapses without receiving the
15 clear to transmit message; and

transmitting a new request to transmit message at a later time.

20. A method in accordance with claim 19, wherein the step of
transmitting further comprises the steps of:

20 determining a backoff time with the at least one QOS parameter
and lapsed time;

waiting until the backoff time expires;

determining a new delay time and a new access time in
conjunction with the at least one QOS parameter and lapsed time;

25 packetising the new request to transmit message which includes
the new delay time; and

transmitting the new request to transmit message after the new
access time has elapsed.

30 21. A method in accordance with claim 19 further comprising,
after step (k) the steps of:

a predetermined time lapsing without receiving the acknowledge message; and

transmitting a new request to transmit message at a later time.

- 5 22. A communication unit for communicating data packets to another communication unit on a common communication channel in a distributed multiple access wireless communication system, the communication unit comprising:
- 10 a) a data input for receiving at least one data packet for transmission to the another communication unit;
 - b) a quality of service (QOS) input for receiving at least one quality of service parameter, wherein the at least one QOS parameter is associated with the at least one data packet;
 - 15 c) a wireless receiver coupled to receive incoming control and data packets on the common communication channel, and having an output for providing the control and data packets;
 - d) a decoder having an input coupled to the output of the wireless receiver for receiving the incoming control and data packets, the decoder having a first output for providing the incoming control
20 packets, and having a second output coupled to provide the incoming data packets to a data output;
 - e) a controller coupled to the QOS input, the controller having an input coupled to the first output of the decoder for receiving incoming control packets, the controller for generating outgoing control packets
25 in accordance with the at least one QOS parameter and the incoming control packets, and the controller having an output for providing the outgoing control packets;
 - f) an encoder having a first input coupled to the output of the controller for receiving the outgoing control packets, the encoder having
30 a second input coupled to the data input for receiving the at least one outgoing data packet, and the encoder having an output for providing

the outgoing control packets and the at least one outgoing data packet;
and

- g) a transmitter having an input coupled to the output of the encoder for receiving the outgoing control packets and the at least one outgoing data packet, and the transmitter having an output adapted to transmit the outgoing control packets and the outgoing at least one data packet on the common communication channel.

23. A communication unit in accordance with claim 22 wherein the at least one QOS parameter comprises perceived QOS parameters.

24. A communication unit in accordance with claim 23 wherein the perceived QOS parameters include number of packets lost in prior transmissions to the another communication unit.

25. A communication unit in accordance with claim 23 wherein the perceived QOS parameters include ratio of number of data packets lost in prior transmissions to the another communication unit to number of data packets sent.

26. A communication unit in accordance with claim 22 wherein the wireless communication unit comprises a radio frequency communication unit.

27. A communication unit is accordance with claim 22 wherein the decoder comprises a control packet detector for detecting the incoming control packets.

28. A communication unit in accordance with claim 22 wherein the controller comprises a control packet decoder for determining transmission parameters from the incoming control packets.

29. A communication unit in accordance with claim 22 wherein the controller comprises a control packet generator for determining which of a plurality of control packets to generate, and for determining at least one transmission parameter for inclusion in at least one of the
5 generated control packets.

30. A communication unit in accordance with claim 22, wherein the controller comprises a translator for translating the at least one QOS parameter into at least one transmission parameter.
10


METHOD AND APPARATUS FOR COMMUNICATING IN A DISTRIBUTED MULTIPLE ACCESS COMMUNICATION SYSTEM

ABSTRACT

5

A communication unit (110) that wants to transmit a data packet to another communication unit (105) must acquire access to a common communication channel (not shown) before transmitting a data packet (440). For data packets of realtime applications, quality of service (QOS) parameters for the data packet are used to define transmission parameters to communicate the data packet (440). These parameters include T_{access} (420) and T_{delay} (430). In addition, compliance with predetermined requirements of size relationship between request-to-send (RTS) and clear-to-send (CTS) packets are imposed.

10

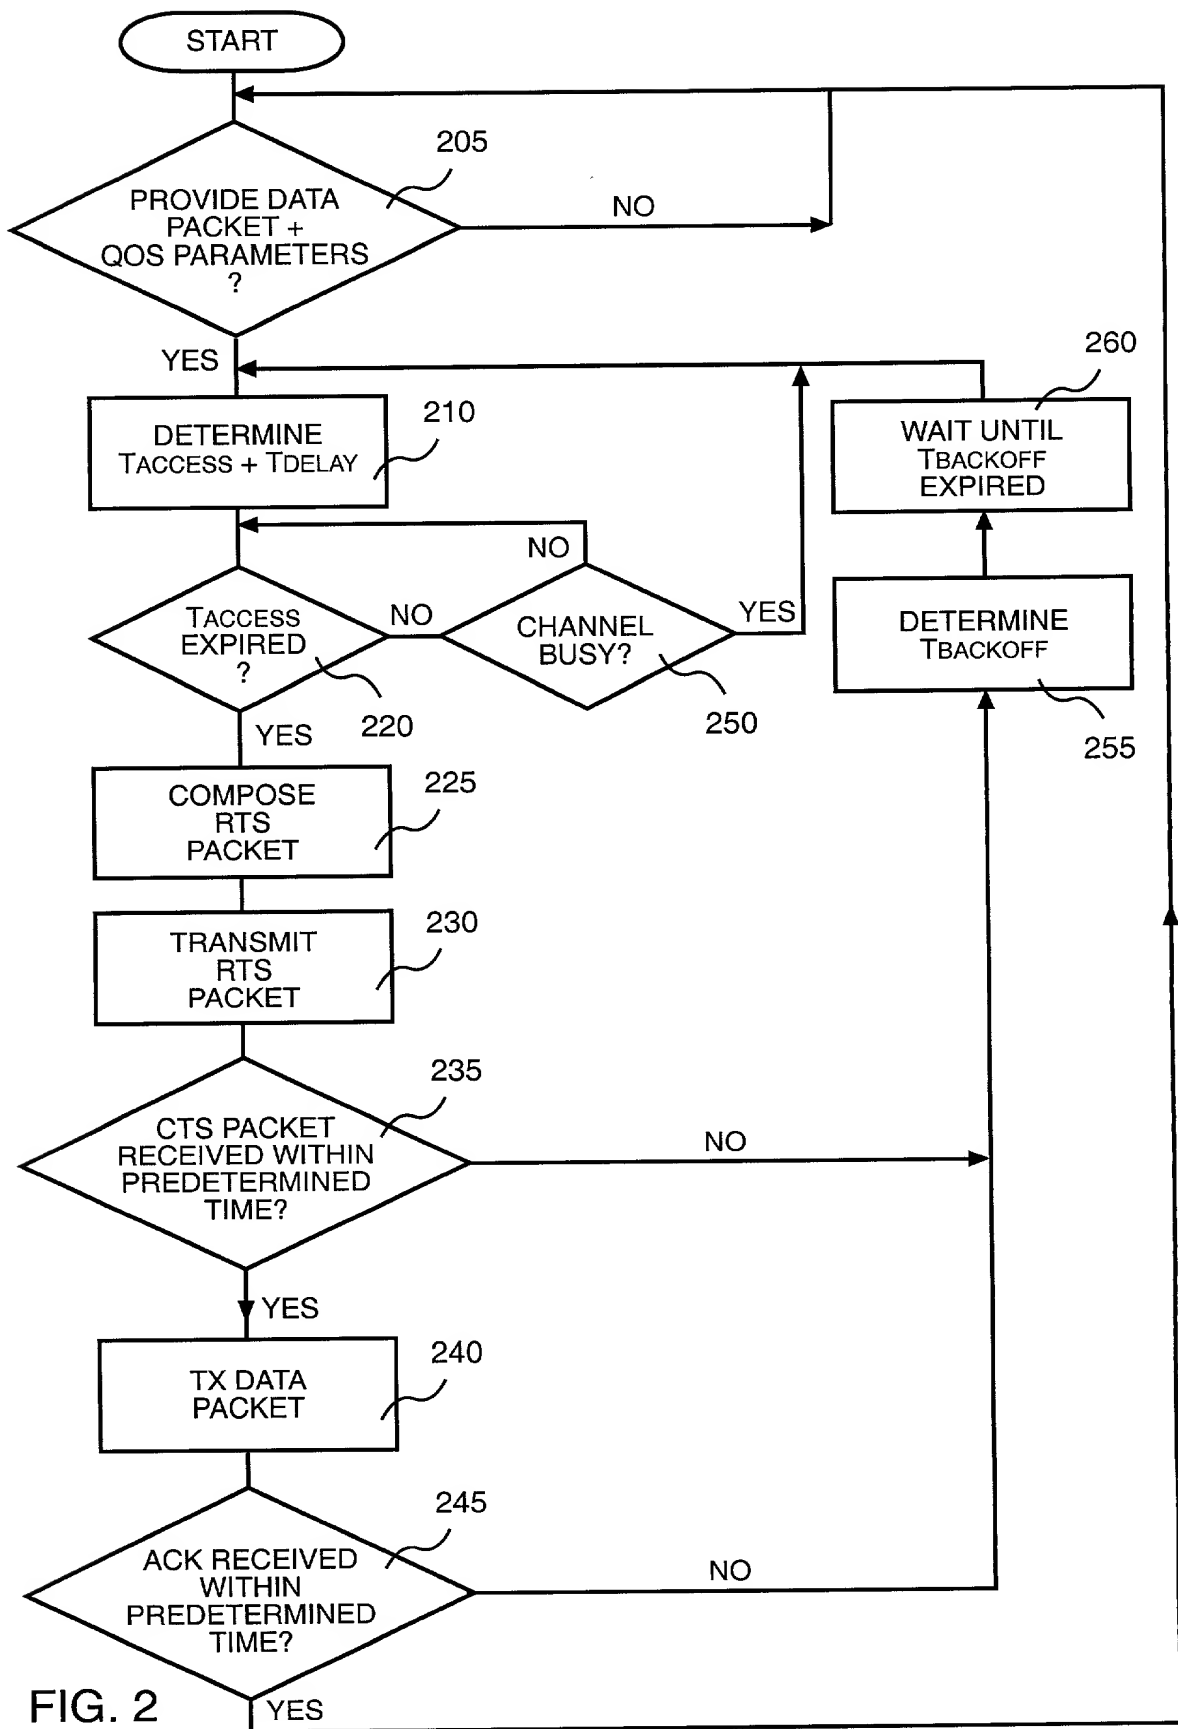

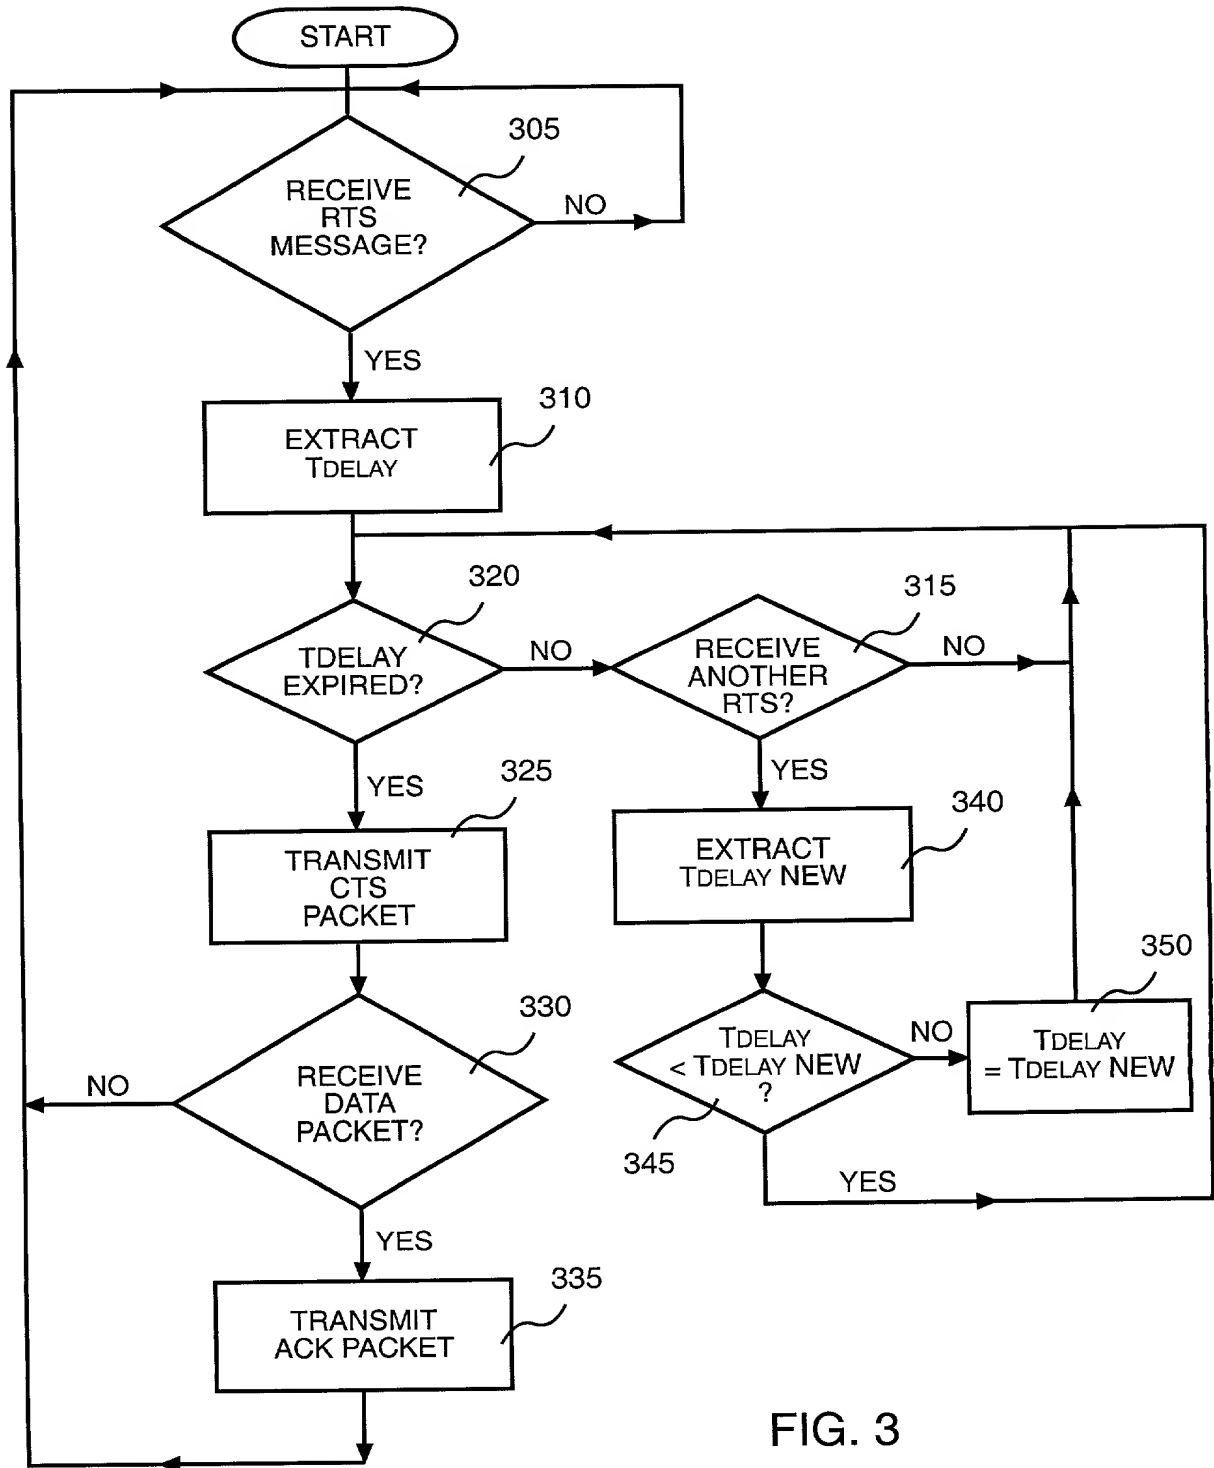


FIG. 3

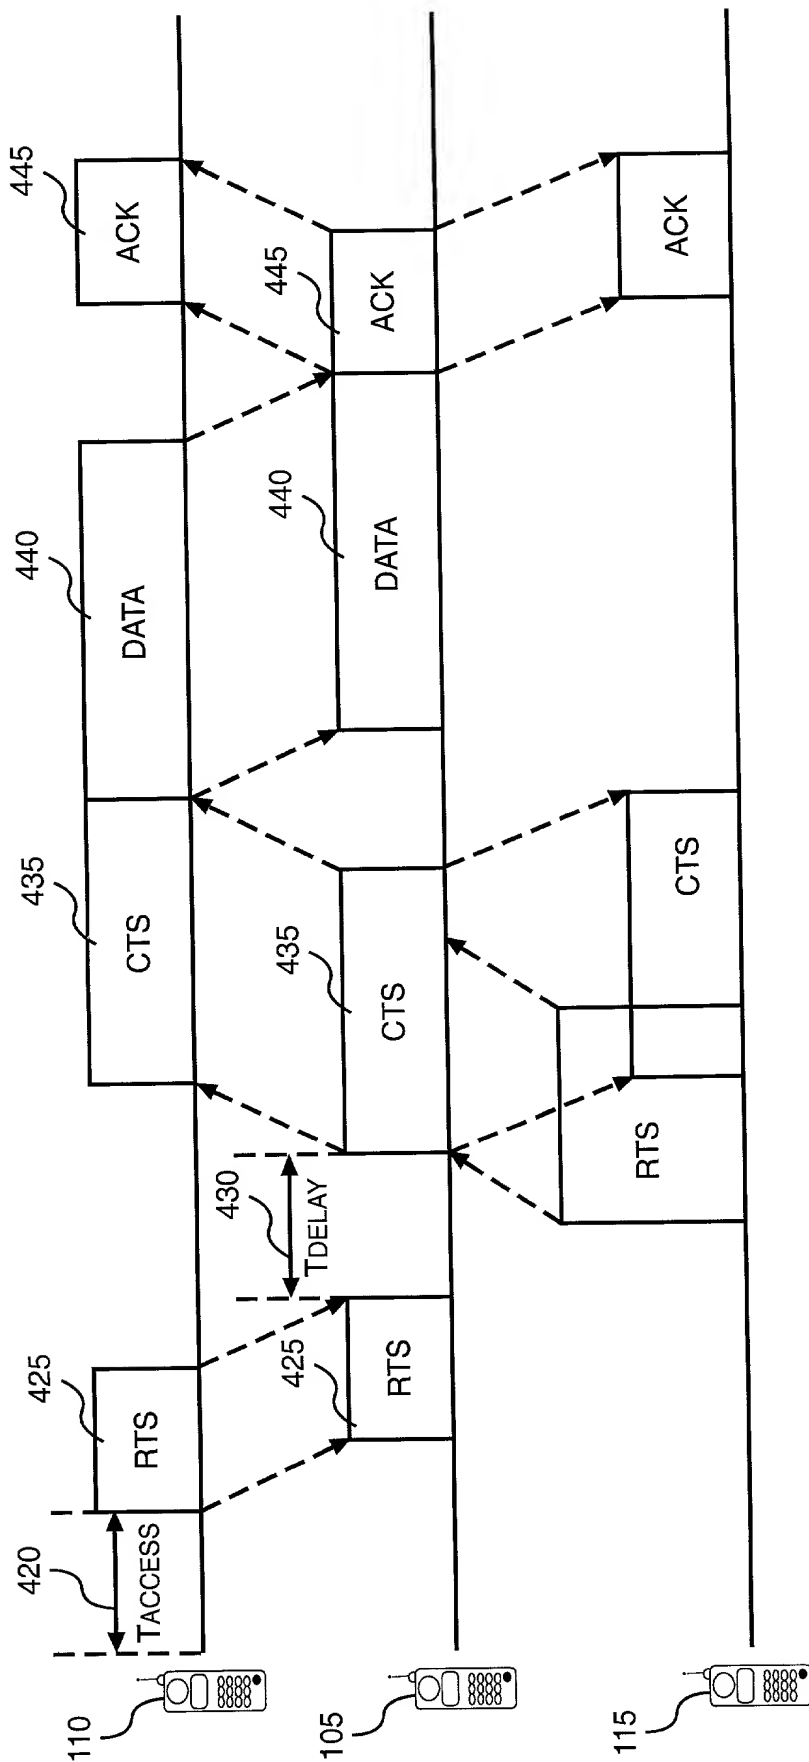


FIG. 4

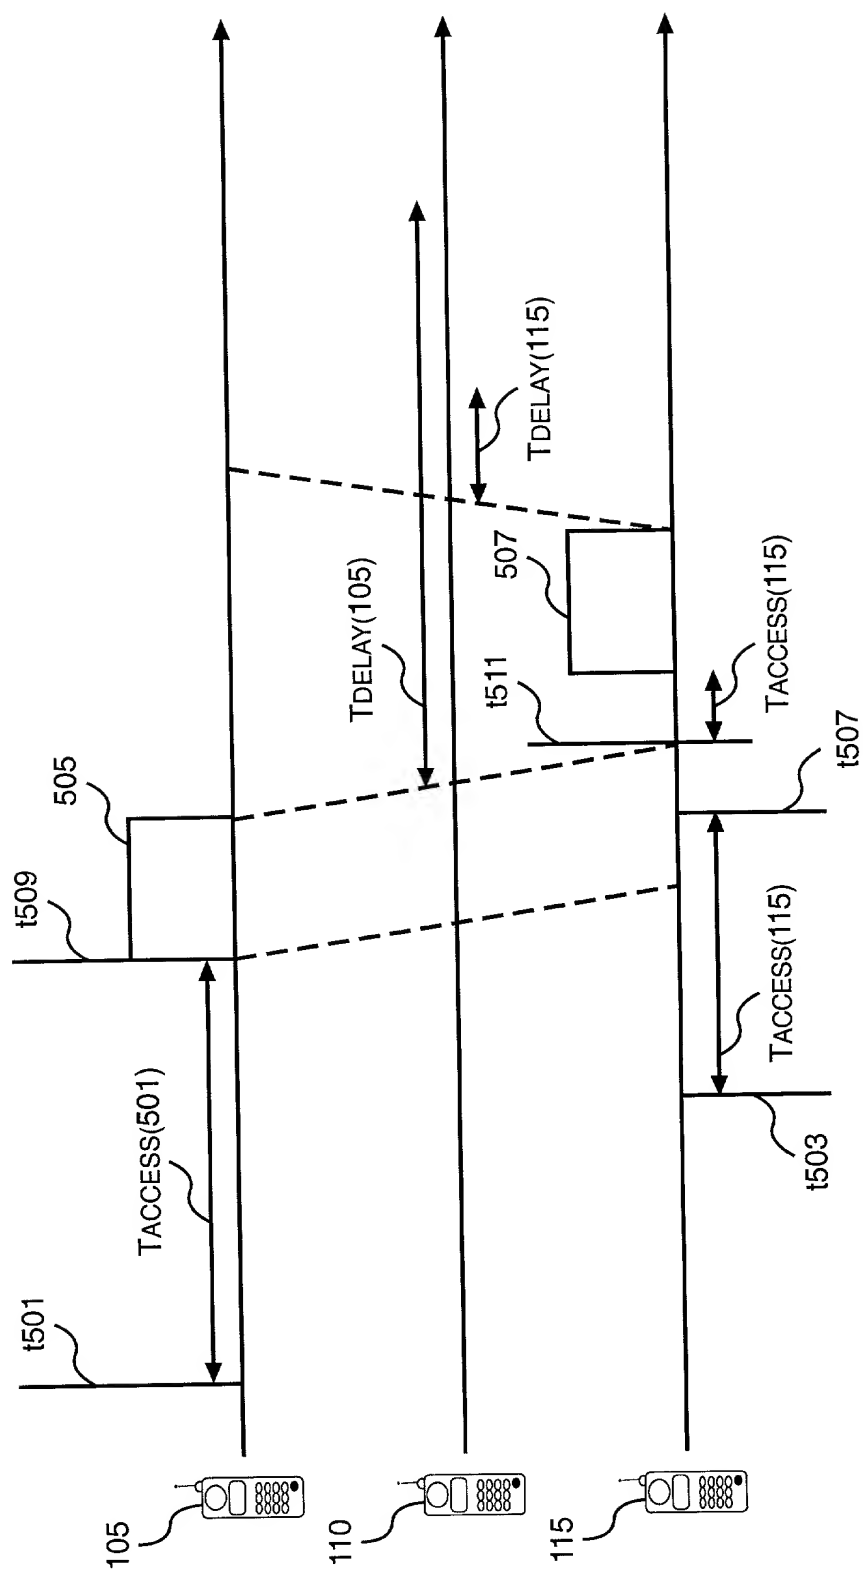


FIG. 5



FIG. 6

Docket: CU-2377

COMBINED DECLARATION AND POWER OF ATTORNEY*(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL, CONTINUATION OR CIP)*

As a below named inventor, I hereby declare that:

TYPE OF DECLARATIONThis declaration is of the following type: *(check one applicable item below)*

- ☒ original
☐ design
☐ supplemental

Note: If the Declaration is for an International Application being filed as a divisional, continuation or continuation-in-part application, do not check next item; check appropriate one of last three items.

- ☐ national stage of PCT

Note: If one of the following 3 items apply, then complete and also attach ADDED PAGES FOR DIVISIONAL, CONTINUATION OR CIP.

- ☐ divisional
☐ continuation
☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

WARNING: If the inventors are each not the inventors of all the claims, an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted.

My residence, post office address and citizenship are as stated below, next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter that is claimed, and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

METHOD AND APPARATUS FOR COMMUNICATING IN A DISTRIBUTED
MULTIPLE ACCESS WIRELESS COMMUNICATION SYSTEM

SPECIFICATION IDENTIFICATIONthe specification of which: *(complete (a), (b) or (c))*

- ☐ (a) is attached hereto.
☒ (b) was filed on 02 November 2000 as ☐ Serial No. _____ or ☒ Express Mail No. *(as Serial No. not yet known)* EL624334027US and was amended on _____ *(if applicable)*.

Note: Amendments filed after the original papers are deposited with the PTO that contain new matter are not accorded a filing date by being referred to in the Declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental Declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims. See 37 CFR 1.67.

- ☐ (c) was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ *(if any)*.

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in 37, Code of Federal Regulations, § 1.56,

(also check the following items, if desired)

- ☐ and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and
- ☐ in compliance with this duty, there is attached an information disclosure statement, in accordance with 37 CFR 1.98.

PRIORITY CLAIM (35 U.S.C. § 119(a)-(d))

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- ☒ (d) no such applications have been filed.
- ☐ (e) such applications have been filed as follows.

Note: Where item (c) is entered above and the international application which designated the U.S. itself claimed priority check item (e), enter the details below and make the priority claim.

PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119(a)-(d)

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day/month/year)	PRIORITY CLAIMED UNDER 35 USC 119
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>

CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)
(34 U.S.C. § 119(e))

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

PROVISIONAL APPLICATION NUMBER	FILING DATE

ALL FOREIGN APPLICATION(S), IF ANY, FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

Note: If the application filed more than 12 months from the filing date of this application is a PCT filing forming the basis for this application entering the United States as (1) the national stage or (2) a continuation, divisional, or continuation-in-part, then also complete ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR CIP APPLICATION for benefit of the prior U.S. or PCT application(s) under 35 U.S.C. § 120.

POWER OF ATTORNEY

I hereby appoint the following practitioner(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith *(list name and registration number)*.

Thomas F. Peterson, 24790; Richard J. Streit, 25765; Donald P. Reynolds, 26220; W. Dennis Drehkoff, 27193; Vangelis Economou, 32341; Paul B. West, 18947; Joseph H. Handelman, 26179; Peter D. Galloway 27885; John Richards, 31503; Iain C. Baillie, 24090; Richard P. Berg, 28145

☐ Attached, as part of this declaration and power of attorney, is the authorization of the above-named practitioner(s) to accept and follow instructions from my representative(s).

SEND CORRESPONDENCE TO:

Thomas F. Peterson
c/o Ladas & Parry
224 South Michigan Avenue
Suite 1200
Chicago, Illinois 60604

DIRECT TELEPHONE CALLS TO:

(Name and telephone number)

(312) 427-1300

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

Note: Carefully indicate the family (or last) name, as it should appear on the filing receipt and all other documents.

Full name of first inventor

Brahim BENSAOU
(Given Name) (Middle Initial or Name) (Family (or Last) Name)

Inventor's signature _____

Date _____ **Country of Citizenship** Algeria

Residence Kowloon, Hong Kong

Post Office Address Senior Staff Quarters, Tower 4 Flat 7B, HKUST, Clear Water Bay,
Kowloon, Hong Kong

Full name of second joint inventor

Yu WANG
(Given Name) (Middle Initial or Name) (Family (or Last) Name)

Inventor's signature _____

Date _____ **Country of Citizenship** People's Republic of China

Residence Santa Cruz, California

Post Office Address Dept. of Computer Engineering, Baskin School of Engineering
University of California, Santa Cruz, California 95064, United States of America

09704807 110200